


WSTYB002 Solar Panel manual

1 Product appearance

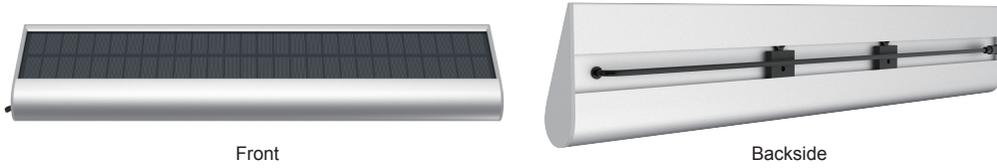


2 Product Features

Monocrystalline silicon solar panel (high photoelectric conversion efficiency and good stability; this is the highest photoelectric conversion efficiency of all types of Solar Panel at present)

3 Technical Data

| | |
|--|--|
| Open-circuit voltage of solar panel: 17V | Protection Index: IP40 |
| Built-in 6 rechargeable lithium batteries | Output power : 4W |
| Battery capacity: 4400mAh | Output voltage: 11.1V |
| Adapter can be fully charged in 6 hours | Lifetime: charge--discharge 500 times |
| Output interface: waterproof plug | Power adapter specifications: output DC16.8V / 1A, DC3.5 * 1.35 |
| Discharge temperature: -20 ° C to 65 ° C | Charging temperature: 0 ° C to 45 ° C |
| Applicable motor type: WSERD40-L or WSERD50-L | Working temperature: -10 ° C to 45 ° C |
| | Overall dimensions: 546mm * 89.6mm*32mm |

4 Battery Charging Solution

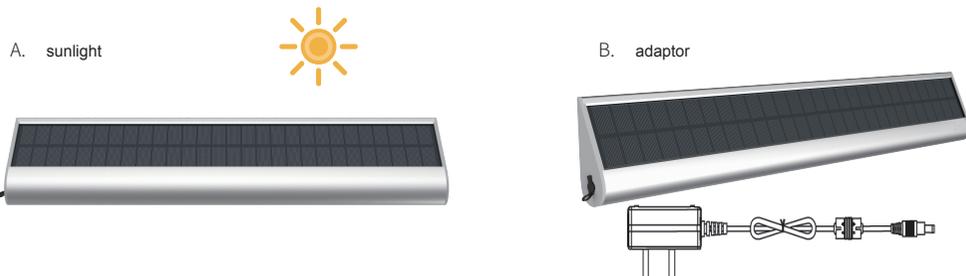

5 Installation

a.Horizontal Installation

Steel structure installation diagram




Figure 1

1. Fix the bracket to the steel structure with M5.5 * 38 self drilling screws, as shown in Figure (1);




Figure 2

1. Turn the solar panel downward as shown in Figure (2), then push it into the slot from left to right;




Figure 3

3. The final installation is completed as shown in Figure (3);

Concrete wall structure installation diagram




Figure 1

1. Fix the bracket on the concrete wall with M6 expansion screws;




Figure 2

2. Turn the solar panel downward as shown in Figure (2), then push it into the slot from left to right;




Figure 3

3. The final installation is completed as shown in Figure (3);

b.Vertical Installation

Steel structure installation diagram




Figure 1

1. Fix the bracket to the steel structure with M5.5 * 38 self drilling screws, as shown in Figure (1);




Figure 2

2. As shown in Figure (2), rotate the solar panel down to the proper angle, and then push it into the slot from bottom up;




Figure 3

3. The final installation is completed as shown in Figure (3);

WSTYB002 Solar Panel manual

Concrete wall structure installation diagram




Figure 1



Figure 2




Figure 3

1. Fix the bracket on the concrete wall with M6 expansion screws;

2. Turn the solar panel downward as shown in Figure (2), then push it into the slot from bottom up;

3. The final installation is completed as shown in Figure (3);

6 Announcements

- 1) Extension cable can be used if needed, but the longer the cable, the more voltage drop. Please ask your supplier for professional advice before using extension cable.
- 2) You are strongly recommended to clean solar panel's surface to get good exposure from sunlight.
- 3) Any problems you encountered, please reference manual or ask for professional advice.
- 4) Keep the product away from children to avoid any hazard.
- 5) Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal Center. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection-service.
- 6) Any improvements to the product will not be notified in advance.